


PRODUCT DETAIL :

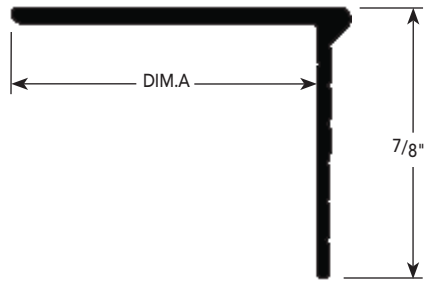

USAGE

Fry Reglet "L" Trim Molding is used as trim around raised or recessed wall panels. A variety of depths permits a wide choice of variations in offsets and drywall thicknesses.


GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "L" Trim Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

"L" TRIM MOLDING SIZES

DIM. A - TRIM DEPTH	NUMBER
1/2"	DRML-50
5/8"	DRML-625
3/4"	DRML-75
1"	DRML-100
1 1/4"	DRML-1250
1 1/2"	DRML-150
1 5/8"	DRML-1625
2"	DRML-200
2 1/2"	DRML-250
3"	DRML-300

INSTALLATION DETAIL : Cross Section

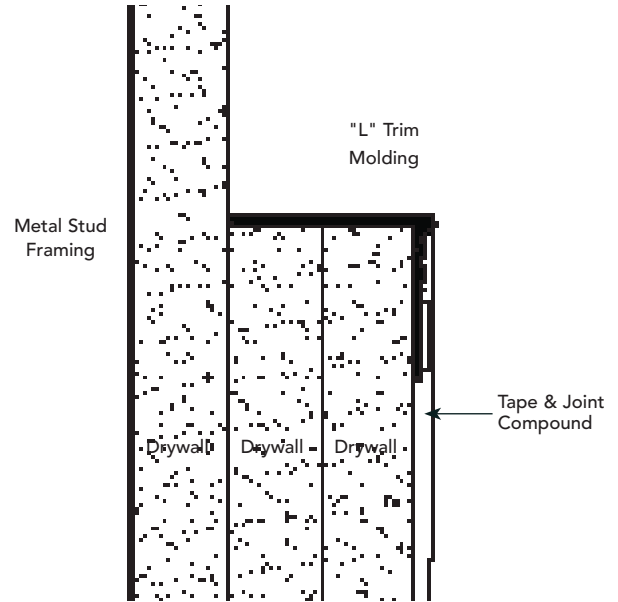

INSTALLATION DETAIL : ISO View

