



PRODUCT DETAIL :

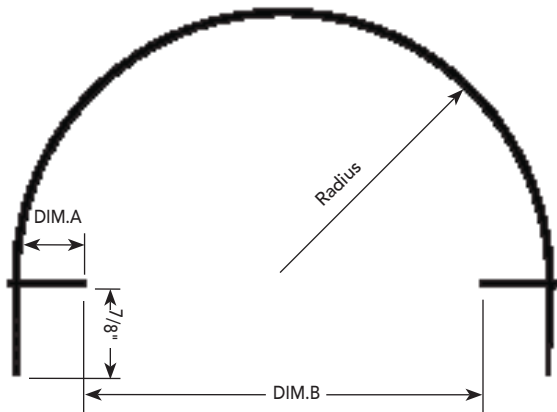

INSTALLATION DETAIL : Cross Section

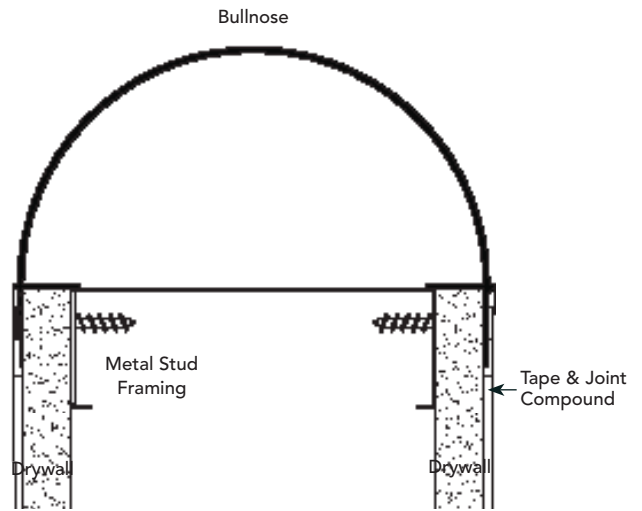

USAGE

Fry Reglet Bullnose is a strong custom aluminum shape used to form a smooth end cap with a radius to attractively terminate walls and to protect wall ends from impact damage.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Bullnose, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

BULLNOSE SIZES

DIM. A DRYWALL THICKNESS	DIM. B STUD WIDTH	NUMBER
5/8"	2 1/2"	DBN-625-250
5/8"	3 5/8"	DBN-625-3625

INSTALLATION DETAIL : ISO View

