


PRODUCT DETAIL :

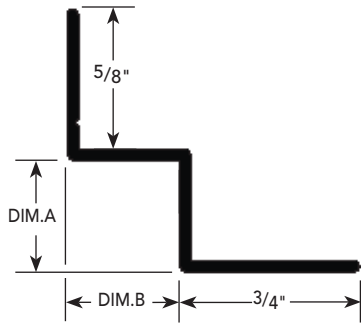

USAGE

Fry Reglet "W" Reveal Molding is used to form a reveal between wall and suspended ceiling, creating a crisp transition. Applications include terminating a soffit from a vertical wall, adding shadow highlights to ceiling/wall interface, creating a crisp reveal termination at top of a square column and providing support for ceiling systems. Available vented for room/plenum air flow.


GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "W" Reveal Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

"W" REVEAL MOLDING SIZES

DIM. A REVEAL DEPTH	DIM. B REVEAL WIDTH	NUMBER	
		NON-VENTED	VENTED
1/2"	1/2"	WDM-50-50	WDM-50-V-50
1/2"	3/4"	WDM-50-75	WDM-50-V-75
5/8"	3/4"	WDM-625-75	WDM-625-V-75
3/4"	3/4"	WRM-75-75	WRM-75-V-75

INSTALLATION DETAIL : Cross Section

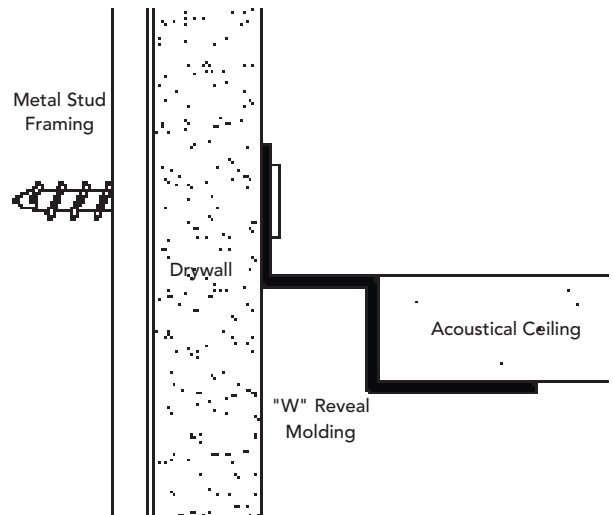

INSTALLATION DETAIL : ISO View

