


PRODUCT DETAIL :

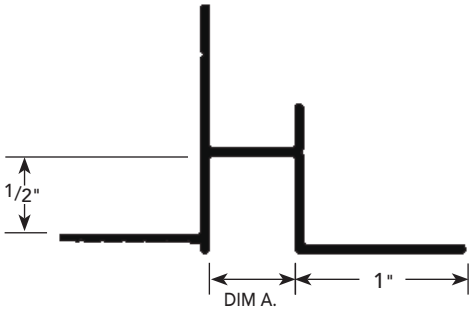

USAGE

Fry Reglet Drywall/Acoustical Reveal is used where an acoustical ceiling meets a drywall ceiling. Provides a 1/2" or 3/4" wide reveal separating the two dissimilar materials, a support for acoustical material and a taping flange for finishing drywall.


GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Drywall/Acoustical Reveal, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

DRYWALL/ACOUSTICAL REVEAL SIZES

REVEAL DEPTH	DIM. A	NUMBER
1/2"	1/2"	DRMAD-50-50
1/2"	1/2"	DRMAD-50-50-916
1/2"	3/4"	DRMAD-50-75

INSTALLATION DETAIL : Cross Section

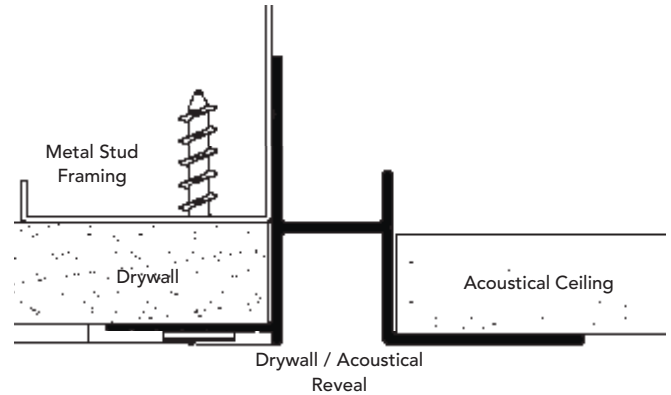

INSTALLATION DETAIL : ISO View

