



PRODUCT DETAIL :

DS-75-75

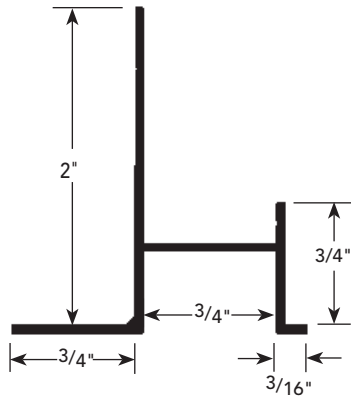

DS-75-200/300

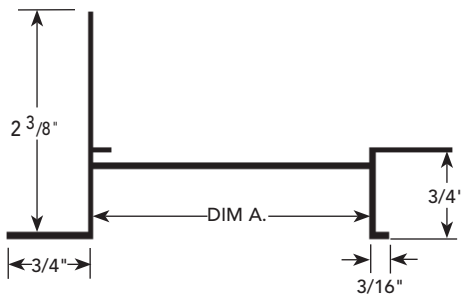

USAGE

Fry Reglet E.I.F.S. Drip Screed neatly joins soffit and fascia while providing a drip joint to prevent water stains on soffit and vertical wall of building. Can be vented if air movement is required. Accommodates a 3/4" plaster fascia and soffit thickness of 7/8" or less (by trimming vertical leg on soffit side of molding).

GUIDE SPECIFICATION

Where indicated on drawings, E.I.F.S. Drip Screed, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.


E.I.F.S. DRIP SCREED SIZES*

DIM. A REVEAL WIDTH	NUMBER	
	NON-VENTED	VENTED
3/4"	DS-75-75	DS-75-V-75
2"	DS-75-200	DS-75-V-200
3"	DS-75-300	DS-75-V-300

*See page PI-1 for data on number of vents and amount of vented area/sq. ft.

INSTALLATION DETAIL : Cross Section

DS-75-75

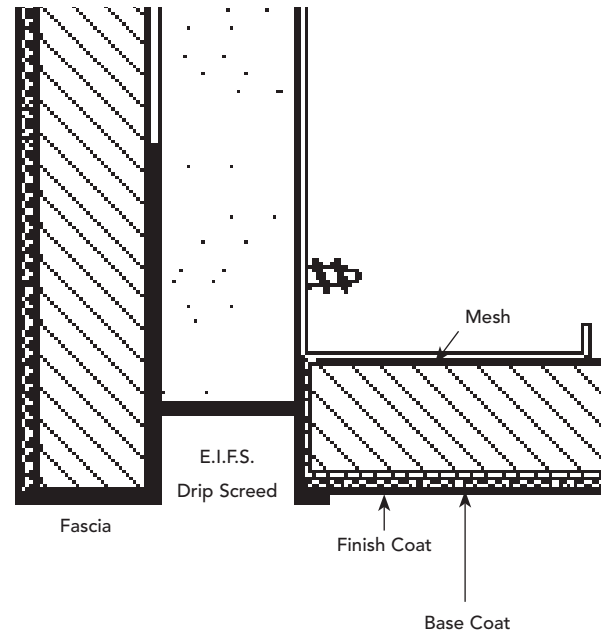

DS-75-200/300

