
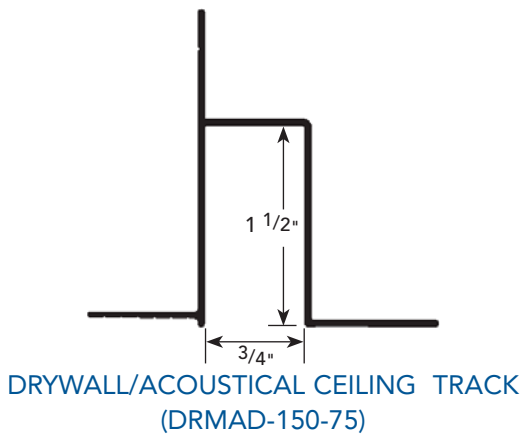


PRODUCT DETAIL :

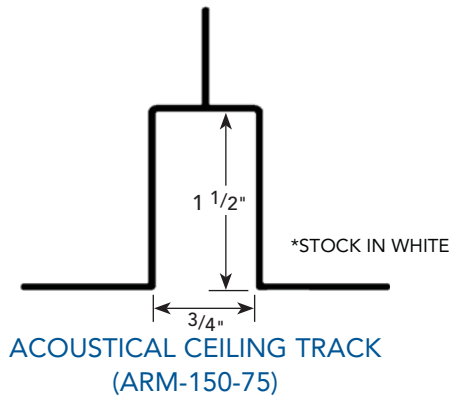



INSTALLATION DETAIL : Cross Section

USAGE


Fry Reglet Glazing Ceiling Track creates a clean, sharp opening in drywall and acoustical ceilings for glass installation.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Glazing Ceiling Track, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5. Standard finish ceiling white.

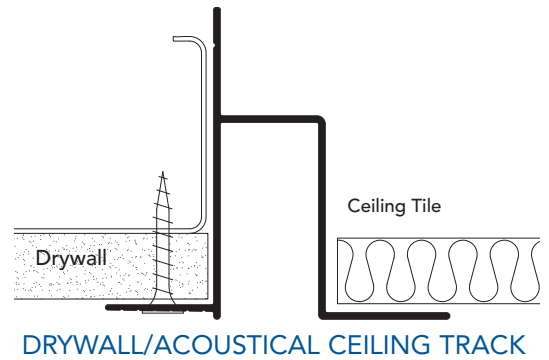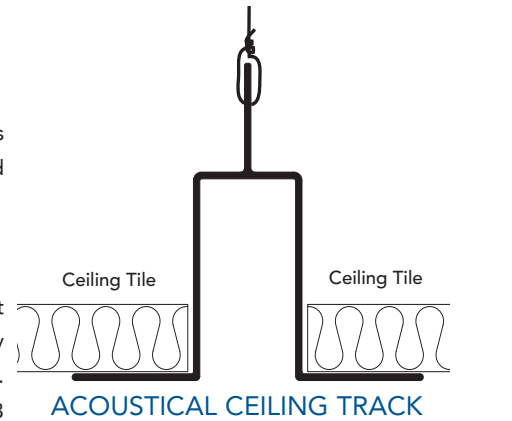

PRODUCT DETAIL :

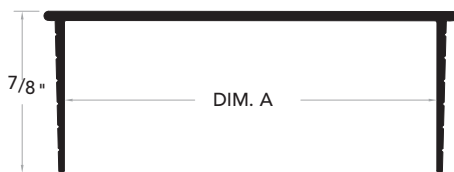

DRYWALL MOLDING END CLOSURE SIZES

DIM. A	NUMBER
3 1/2"	DMEC 3500
3 3/4"	DMEC 3750
4 5/8"	DMEC 4625
4 7/8"	DMEC 4875


USAGE

Fry Reglet Drywall Molding End Closure creates a smooth, vertical surface at each side of glazed openings.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Drywall Molding End Closure, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

INSTALLATION DETAIL : Cross Section

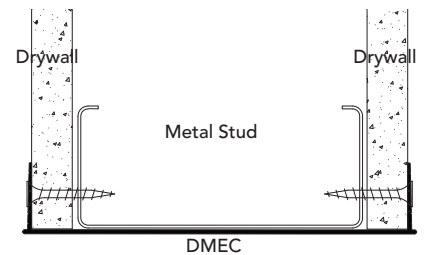

INSTALLATION DETAIL : ISO View

