


PRODUCT DETAIL :

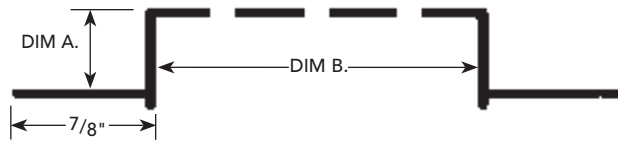

USAGE

Fry Reglet E.I.F.S. Soffit Vent Direct Applied is sized for use with direct applied E.I.F.S. substrated in soffits with an E.I.F.S. system. Forms attractive reveal and provides air flow into spaces above soffit.

GUIDE SPECIFICATION


Where indicated on drawings, Fry Reglet E.I.F.S. Soffit Vent (Direct Applied), as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

E.I.F.S. SOFFIT VENT (DIRECT APPLIED) SIZES

DIM. A	DIM. B - REVEAL WIDTH	NUMBER
1/2"	1/2"	DRM-50-V-50
1/2"	5/8"	DRM-50-V-625
1/2"	3/4"	DRM-50-V-75
1/2"	1"	DRM-50-V-100
1/2"	1 1/2"	DRM-50-V-150
1/2"	2"	DRM-50-V-200
1/2"	2 1/2"	DRM-50-V-250
1/2"	3"	DRM-50-V-300
1/2"	4"	DRM-50-V-400
5/8"	1/2"	DRM-625-V-50
5/8"	5/8"	DRM-625-V-625
5/8"	3/4"	DRM-625-V-75
5/8"	1"	DRM-625-V-100
5/8"	1 1/4"	DRM-625-V-125
5/8"	1 1/2"	DRM-625-V-150
5/8"	2"	DRM-625-V-200
5/8"	2 1/2"	DRM-625-V-250
5/8"	3"	DRM-625-V-300
5/8"	4"	DRM-625-V-400
5/8"	6"	DRM-625-V-600

*See page PI-1 for data on number of vents and amount of vented area/sq. ft.

INSTALLATION DETAIL : Cross Section

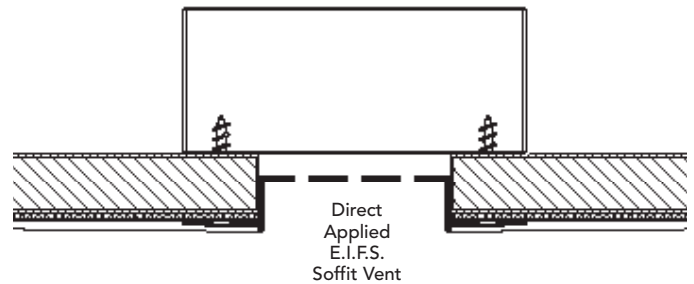

*Denglass Gold, Durock, or other approved DEF substrate.

*Refer to EIFS manufacturer for installation requirements